

Beam IP54

2,2W / 185lm / 3000K / DALI / Spot 14° /
ø75mm

60413

Design: O/M
Ceiling-recessed luminaire made of aluminium die-cast.
Recessing accessory for flush version supplied separately.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / power supply included
IP54 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power		2,2W	2,8W
Flux		215lm	185lm
Efficiency		98lm/W	66lm/W
LOR		-	86%
UGR		-	<10



Beam angle
Spot 14°

Application



Weight
0,38Kg



Ø70 (trim version)



Finishes

- .04 Matt White
- .05 Matt Black

Optional

- 59063** Flush accessory (12.5mm ceilings)
176x17mm
- 59064** Flush accessory (15mm ceilings)
176x19,5mm
- 59065** Flush accessory (25mm ceilings)
176x29,5mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com
The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class F
Model Identifier 4053560280

Beam IP54

Flush accessory (12.5mm
ceilings)

59063



Ø88



Flush accessory Beam ø75
For 12.5mm ceilings.

Weight
0,05Kg

Finishes
.99

Beam IP54

Flush accessory (15mm
ceilings)

59064




Ø88



Flush accessory Beam ø75
For 15mm ceilings.

Weight
0,05Kg

Finishes
.99

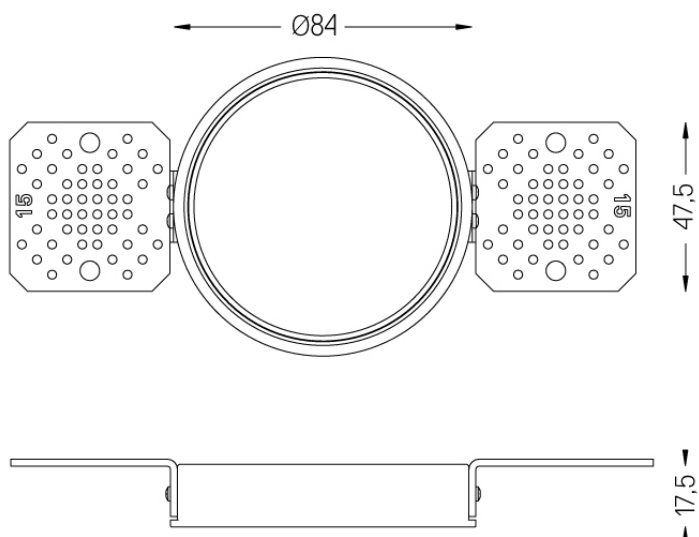

Beam IP54

Flush accessory (25mm
ceilings)

59065

mm

Ø88



Flush accessory Beam Ø75
For 25mm ceilings.

Weight
0,05Kg

Finishes
.99