

## Beam IP54

10W / 682lm / 3000K / DALI / Diffuse /  
ø100mm

60456

Design: O/M

Ceiling-recessed luminaire made of aluminium die-cast.

Recessing accessory for flush version supplied separately.

LED CRI>80 / >50.000h, L80/B10  
3-step MacAdam / power supply included  
IP54 | 230Vac | 50/60Hz



| LED        | 3000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 10W          | 12,5W     |
| Flux       |       | 1200lm       | 682lm     |
| Efficiency |       | 120lm/W      | 55lm/W    |
| LOR        |       | -            | 57%       |
| UGR        |       | -            | <28       |



Beam angle  
Diffuse

Application



Weight  
0,5Kg



Ø95 (trim version)



Finishes

- .04 Matt White
- .05 Matt Black

Optional

- 59066** Flush accessory (12.5mm ceilings)  
201x17mm
- 59067** Flush accessory (15mm ceilings)  
201x19,5mm
- 59068** Flush accessory (25mm ceilings)  
201x29,5mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class E Model Identifier BXR-30E2000-C-89

## Beam IP54

Flush accessory (12.5mm  
ceilings)

59066



Ø112



Flush accessory Beam Ø100  
For 12.5mm ceilings.

Weight  
0,05Kg

Finishes  
.99



## Beam IP54

Flush accessory (15mm  
ceilings)

59067




Ø112



Flush accessory Beam Ø100  
For 15mm ceilings.

Weight  
0,05Kg

Finishes  
.99

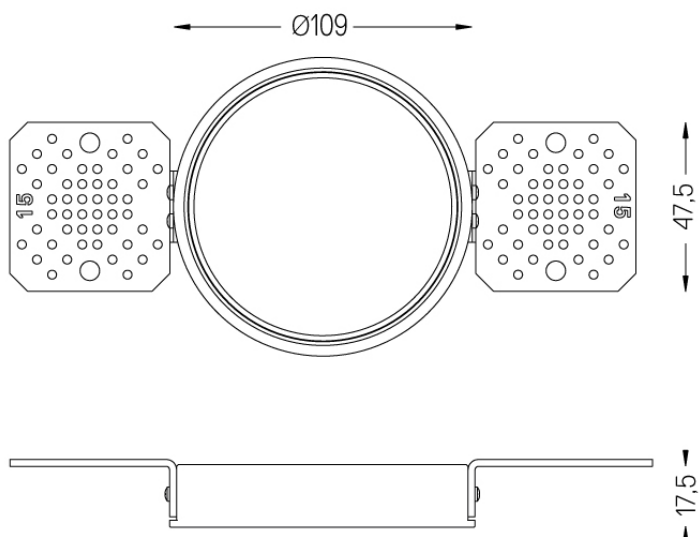

## Beam IP54

Flush accessory (25mm  
ceilings)

59068



Ø112



Flush accessory Beam Ø100  
For 25mm ceilings.

Weight  
0,05Kg

Finishes  
.99

