



Design: O/M  
Ceiling-recessed luminaire made of aluminium die-cast.  
Recessing accessory for flush version supplied separately.

LED CRI>80 / >50.000h, L80/B10  
3-step MacAdam / power supply included  
IP54 | 230Vac | 50/60Hz




LED	4000K	Light Source	Luminaire
Power		10W	12,5W
Flux		1450lm	860lm
Efficiency		145lm/W	69lm/W
LOR		-	59%
UGR		-	<28



Beam angle	100°
Diffuse	
Application	
Weight	0,5Kg



Ø95 (trim version)

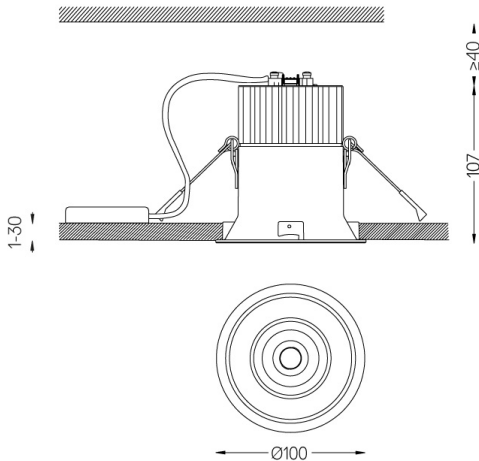

- Finishes
- .04 Matt White
  - .05 Matt Black

- Optional
- 59066** Flush accessory (12.5mm ceilings)  
201x17mm
  - 59067** Flush accessory (15mm ceilings)  
201x19,5mm
  - 59068** Flush accessory (25mm ceilings)  
201x29,5mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations  
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class E  
Model Identifier BXR-40E2000-C-77

## Beam IP54

Flush accessory (12.5mm  
ceilings)

59066




Ø112



Flush accessory Beam Ø100  
For 12.5mm ceilings.

Weight  
0,05Kg

Finishes  
.99

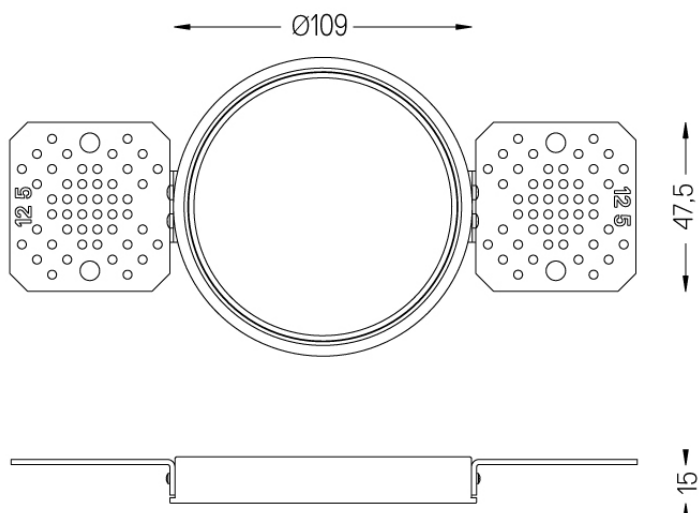


## Beam IP54

Flush accessory (15mm  
ceilings)

59067



Ø112

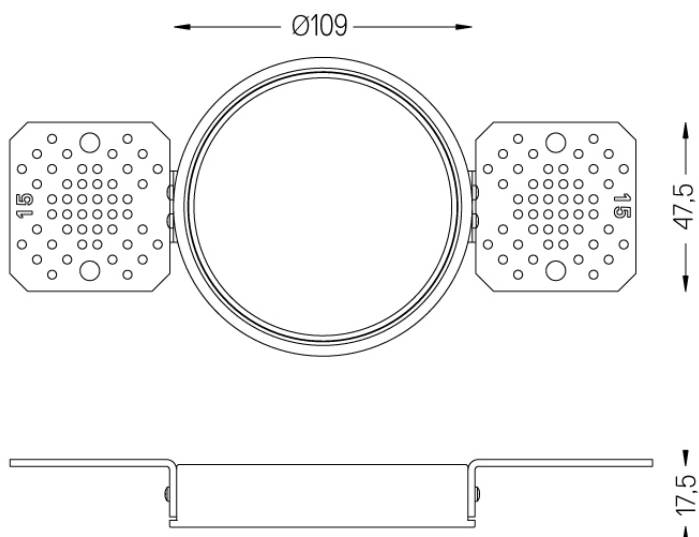

Flush accessory Beam Ø100  
For 15mm ceilings.

Weight  
0,05Kg

Finishes  
.99

## Beam IP54

Flush accessory (25mm  
ceilings)

59068



Ø112



Flush accessory Beam Ø100  
For 25mm ceilings.

Weight  
0,05Kg

Finishes  
.99

