

Beam IP54

10W / 1050lm / 4000K / DALI / Medium 28° /
ø100mm

60464

Design: O/M
Ceiling-recessed luminaire made of aluminium die-cast.
Recessing accessory for flush version supplied separately.

LED CRI>80 / >50.000h, L80/B10
3-step MacAdam / power supply included
IP54 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power	10W		12,5W
Flux	1450lm		1050lm
Efficiency	145lm/W		84lm/W
LOR	-		72%
UGR	-		<19



Beam angle
Medium 28°


Application



Weight
0,5Kg



Ø95 (trim version)

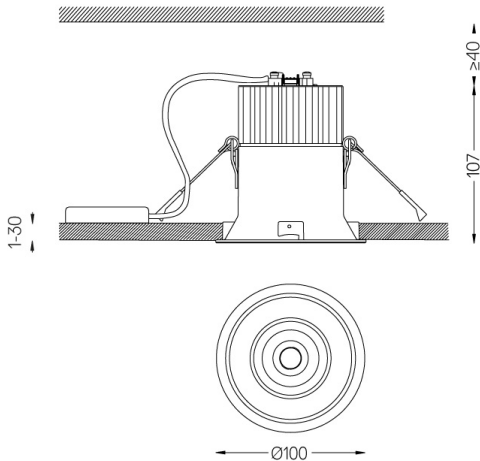

Finishes

- .04 Matt White
- .05 Matt Black

Optional

- 59066** Flush accessory (12.5mm ceilings)
201x17mm
- 59067** Flush accessory (15mm ceilings)
201x19,5mm
- 59068** Flush accessory (25mm ceilings)
201x29,5mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class E
Model Identifier BXR-40E2000-C-85

Beam IP54

Flush accessory (12.5mm
ceilings)

59066



Ø112



Flush accessory Beam Ø100
For 12.5mm ceilings.

Weight
0,05Kg

Finishes
.99




Beam IP54

Flush accessory (15mm
ceilings)

59067



Ø112

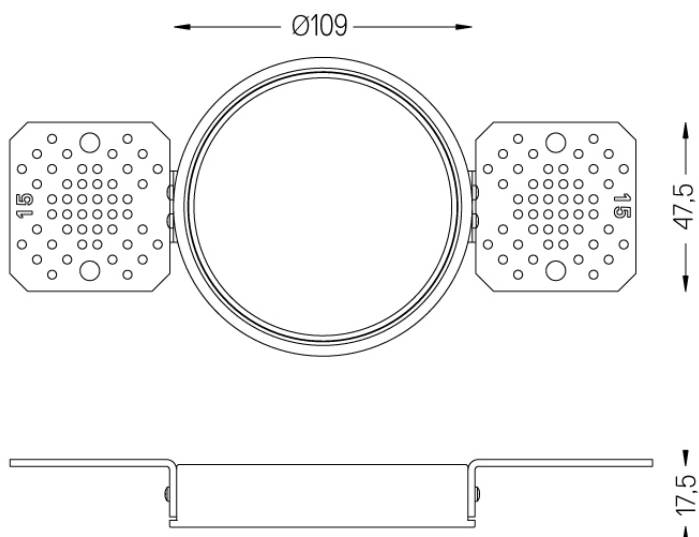

Flush accessory Beam Ø100
For 15mm ceilings.

Weight
0,05Kg

Finishes
.99

Beam IP54

Flush accessory (25mm
ceilings)

59068



Ø112



Flush accessory Beam Ø100
For 25mm ceilings.

Weight
0,05Kg

Finishes
.99

