

33+70W / 3600+3400lm / 4000K / DALI /  
 Wide flood 76° / batwing / 2920mm

**60545**

Product timing available by request



Design: OM + Bartenbach GmbH  
 Pendant direct and indirect luminaire with housing made of aluminium in matte finish.  
 Aluminium anodised end caps with matt finish.  
 Linear lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.  
 Indirect light: Lenses for batwing effect protected by a transparent polycarbonate diffuser.  
 Fitting accessories ordered separately.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
 Power supply included.  
 IP20 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power		33+70W	39+80W
Flux		4500+4300lm	3600+3400lm
Efficiency		85lm/W	58lm/W
LOR		-	80%
UGR		-	<19




Beam angle  
 Wide flood 76° /  
 batwing

Application



Weight  
 10,2Kg

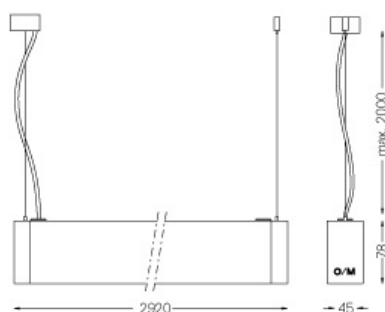

Finishes

- .04 Matt White
- .05 Matt Black

Mandatory

59054 Pendant direct/indirect fitting accessory

56051 Clear Base DALI

ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:  
[support@om-light.com](mailto:support@om-light.com)