

56W\* / 6000lm\* / 2200K-5000K / DALI /  
Flood 64° / 2929mm

60560



Design: OM + Bartenbach GmbH

Surface or pendant luminaire with housing made of aluminium with 25 micron maximum corrosion resistance anodization in matte finish or electrostatic 100% polyester paint with textured finish.

Aluminium anodised end caps with matt finish or electrostatic 100% polyester paint with textured-finish.

Linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.

Fitting accessories ordered separately.

LED CRI&gt;80 / &gt;50.000h, L80/B10 / 2-step MacAdam

Power supply included.

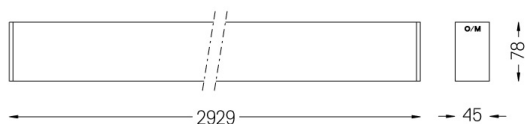
IP20 | 230Vac | 50/60Hz



| LED        | 2200K-5000K | Light Source | Luminaire |
|------------|-------------|--------------|-----------|
| Power      |             | 56W*         | 65,9W*    |
| Flux       |             | 7500lm*      | 6000lm*   |
| Efficiency |             | 134lm/W      | 91lm/W    |
| LOR        |             | -            | 80%       |
| UGR        |             | -            | <13       |

Beam angle  
Flood 64°

Application

Weight  
4,7Kg

Finishes

○ .01 White / RAL 9010

● .02 Black / RAL 9005

Mandatory

54036 Pendant direct fitting accessory

56051 Clear Base DALI

ø60x35mm