

32W / 1450lm / 2700K / DALI / Wallwasher /
1211mm

60584



Design: OM + Bartenbach GmbH

Surface or pendant luminaire with housing made of aluminium with 25 micron maximum corrosion resistance anodization in matte finish or electrostatic 100% polyester paint with textured finish.

Aluminium anodised end caps with matt finish or electrostatic 100% polyester paint with textured finish.

Linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.

Fitting accessories ordered separately.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz



| LED | 2700K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 32W | 37,6W |
| Flux | | 3200lm | 1450lm |
| Efficiency | | 100lm/W | 39lm/W |
| LOR | | - | 45% |
| UGR | | - | - |




Beam angle
Wallwasher

Application



Weight
2Kg

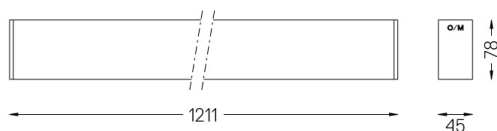

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .10 Anodised aluminium

Mandatory

54036 Pendant direct fitting accessory

56051 Clear Base DALI

ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com