

46W* / 2840lm* / 2200K-5000K / DALI /
Flood 52° / 1211mm

60705



Design: O/M + Bartenbach GmbH

Surface or pendant luminaire with housing made of aluminium with electrostatic 100% polyester paint with textured finish.

Aluminium anodised end caps with matt finish or electrostatic 100% polyester paint with textured-finish.

Housing and perforated cover plate made of aluminium with textured-paint finish. With the latest Bartenbach GmbH technology, inVision35 is a discreet solution, that can use great light distribution and visual comfort from a nearly invisible source.

Fitting accessories for pendant version ordered separately.

LED >80CRI<90 / >50.000h, L80/B10 / 3-step MacAdam


Power supply included.

DALI DT8.


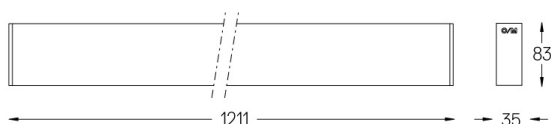
IP20 | 230Vac | 50/60Hz



| LED | 2200K-5000K | Light Source | Luminaire |
|------------|-------------|--------------|-----------|
| Power | | 46W* | 58W* |
| Flux | | 3760lm* | 2840lm* |
| Efficiency | | 82lm/W | 49lm/W |
| LOR | | - | 76% |
| UGR | | - | <16 |

Beam angle
Flood 52°

Application

Weight
2,4Kg

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

54036 Pendant direct fitting accessory

56051 Clear Base DALI

ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com