

U35

Surface/Pendant

34W / 3300lm / 4000K / DALI / Diffuse /
1429mm

60845



Design: Eduardo Souto de Moura

Surface or pendant luminaire with housing made of aluminium profile with 25micron maximum corrosion resistance anodization with matt finish or with textured electrostatic 100% polyester paint. Frosted polycarbonate diffuser with user friendly clipping system and double fitting system: flushed or recessed.

Aluminium anodised end caps with matt finish or electrostatic 100% polyester paint with textured-finish.

Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP40 | 230Vac | 50/60Hz



| LED | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 34W | 40W |
| Flux | | 6500lm | 3300lm |
| Efficiency | | 191lm/W | 83lm/W |
| LOR | | - | 51% |
| UGR | | - | <28 |



Beam angle
Diffuse

Application



Weight
1,7Kg



Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .10 Anodised aluminium

Mandatory

54036 Pendant direct fitting accessory

56051 Clear Base DALI

ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C
Model Identifier 89603212, 89603217

U35 Surface/Pendant

Pendant direct fitting
accessory

54036




One 2m steel cable (1,2mm)
Max interval 3m

U35 Surface/Pendant

Clear Base DALI

56051

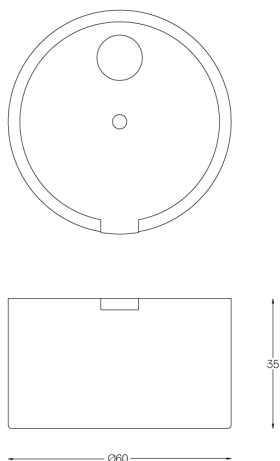

DALI (5x0,75mm²). Includes:
 One clear polycarbonate power supply base (IP20).
 One clear power cable (2m).
 One clear power supply base must be applied every 30m (Ø60x35mm)
 Steel cable ordered separately