

9,9W / 910lm / 3000K / DALI / Diffuse /  
699mm

60896


Design: O/M  
LED light source with good colour consistency and  
long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



- |                       |                       |
|-----------------------|-----------------------|
| <b>Structure</b>      | <b>Diffuser</b>       |
| 1 Profile             | A Polycarbonate frost |
| 2 End caps            | diffuser              |
| 3 Fitting accessories | <b>Light Source</b>   |
| 4 Profile coupling    | B LED Modules         |


LED	3000K	Light Source	Luminaire
Power		9,9W	12,4W
Flux		1790lm	910lm
Efficiency		181lm/W	74lm/W
LOR		-	51%
UGR		-	<25

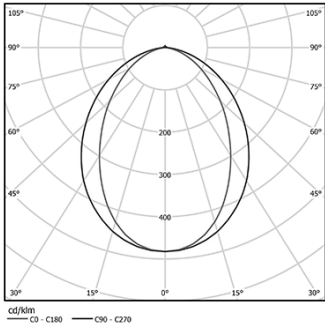

Beam angle  
Diffuse

Application

Weight  
0,5Kg

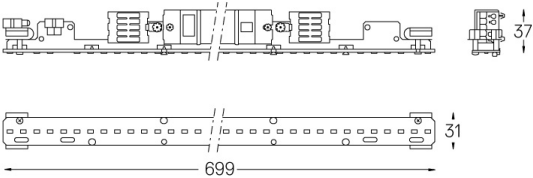

Finishes

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to  
model the right lighting functions for different tasks. For further  
information please contact: support@om-light.com

Data according to regulations  
2019/2020/EU supplemented by 2021/341 [2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
Model Identifier 89603206, 89603216