

14W / 1300lm / 4000K / DALI / Flood 52° / 600mm

60976

Design: O/M + Bartenbach GmbH
inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz




- Structure**

 - 1 Profile
 - 2 End caps
 - 3 Fitting accessories
 - 4 Profile coupling
- Modules**

 - A inVision Module

| LED | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 14W | 17,1W |
| Flux | | 1720lm | 1300lm |
| Efficiency | | 123lm/W | 76lm/W |
| LOR | | - | 76% |
| UGR | | - | <13 |

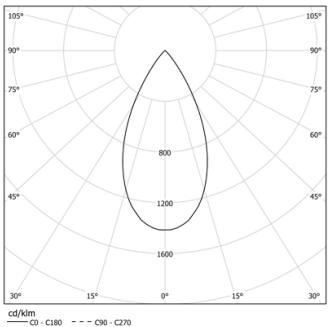


Beam angle
Flood 52°

Application



Weight
0,5Kg

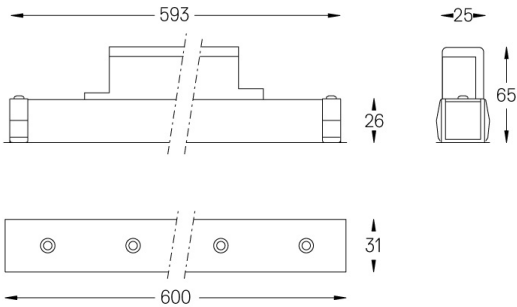

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com