



Compatibility with other modules must be confirmed  
with [support@om-light.com](mailto:support@om-light.com)

Design: OM + Bartenbach  
GmbH  
Module with linear extruded lenses (Lightstream)  
combined with a secondary reflector, integrated into  
an extruded aluminium profile.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

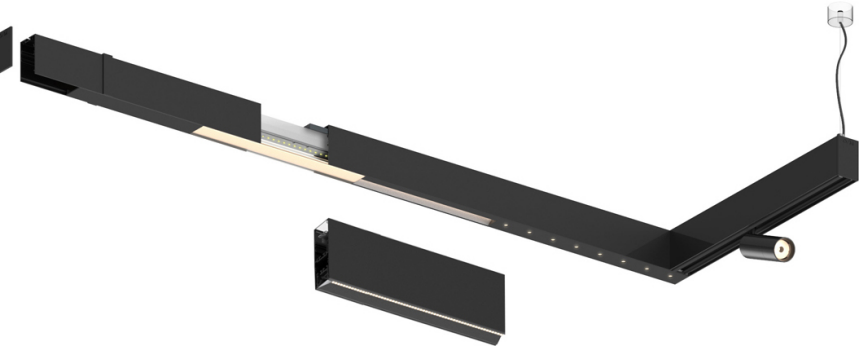


|            |         |              |                    |
|------------|---------|--------------|--------------------|
|            | 3000K   | Light Source | Luminaire          |
| Power      | 17W     |              | 20W                |
| Flux       | 2100lm  |              | 1700lm             |
| Efficiency | 127lm/W |              | 87lm/W             |
| LOR        | -       |              | 0.8100000000000001 |
| UGR        | -       |              | <19                |



Beam angle  
Wide flood 80°

Application

Weight

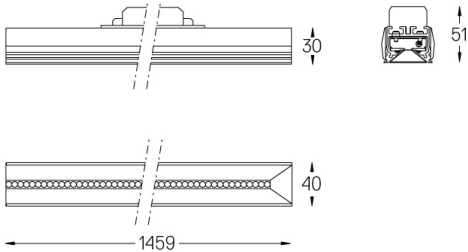

- Finishes
- .01 White / RAL 9010
  - .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
[support@om-light.com](mailto:support@om-light.com)

Choose the length and layout of the system exactly as you want it, to  
model the right lighting functions for different tasks. For further  
information please contact: [support@om-light.com](mailto:support@om-light.com)