

14W / 1440lm / 4000K / DALI / Flood 65° / 1171mm

61175

Compatibility with other modules must be confirmed with [support@om-light.com](mailto:support@om-light.com)

Design: OM + Bartenbach GmbH  
Module with linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz




| LED        | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 14W          | 16W       |
| Flux       |       | 1800lm       | 1440lm    |
| Efficiency |       | 136lm/W      | 92lm/W    |
| LOR        |       | -            | 0.8       |
| UGR        |       | -            | <13       |



Beam angle  
Flood 65°

Application

Weight

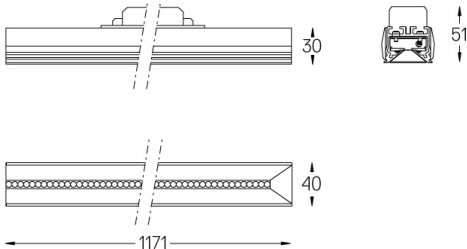

- Finishes
- .01 White / RAL 9010
  - .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact: [support@om-light.com](mailto:support@om-light.com)

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: [support@om-light.com](mailto:support@om-light.com)