


28W\* / 2900lm\* / 2200K-5000K / DALI /  
Flood 65° / 1459mm

61191

Compatibility with other modules must be confirmed  
with [support@om-light.com](mailto:support@om-light.com)

Design: OM + Bartenbach  
GmbH  
Module with linear extruded lenses (Lightstream)  
combined with a secondary reflector, integrated into  
an extruded aluminium profile.

LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

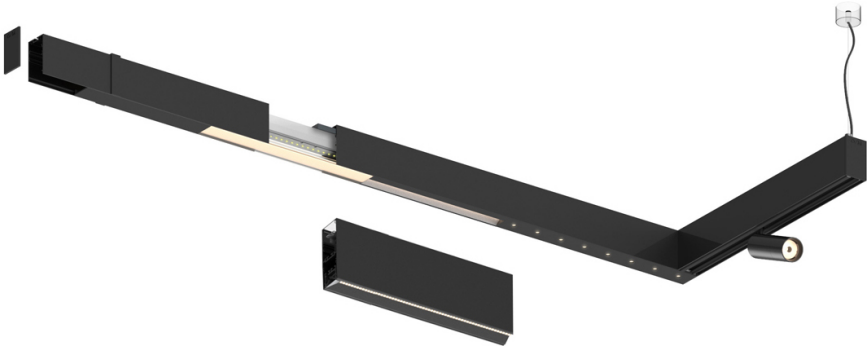

LED	2200K-5000K	Light Source	Luminaire
Power		28W*	33W*
Flux		3650lm*	2900lm*
Efficiency		120lm/W	85lm/W
LOR		-	0.8273381294964028
UGR		-	<13



Beam angle  
Flood 65°  
  
Application  
  
Weight



Finishes  
○ .01 White / RAL 9010  
● .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
[support@om-light.com](mailto:support@om-light.com)  
  
Choose the length and layout of the system exactly as you want it, to  
model the right lighting functions for different tasks. For further  
information please contact: [support@om-light.com](mailto:support@om-light.com)