

Compatibility with other modules must be confirmed with [support@om-light.com](mailto:support@om-light.com)

Design: OM + Bartenbach GmbH


Module with linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.

LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz




|   |             |                    |           |
|---|-------------|--------------------|-----------|
|  LED | 2200K-5000K | Light Source       | Luminaire |
| Power   | 28W *       | 33W *              |           |
| Flux  | 3650lm *    | 2900lm *           |           |
| Efficiency  | 120lm/W     | 85lm/W             |           |
| LOR   | -           | 0.8273381294964028 |           |
| UGR   | -           | <13                |           |



Beam angle  
Flood 65°

Application

Weight

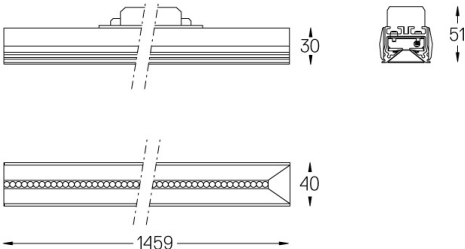

- Finishes
-  .01 White / RAL 9010
  -  .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact: [support@om-light.com](mailto:support@om-light.com)

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: [support@om-light.com](mailto:support@om-light.com)