

28W\* / 2900lm\* / 2200K-5000K / DALI /  
Wide flood 80° / 1459mm


61192

Compatibility with other modules must be confirmed  
with [support@om-light.com](mailto:support@om-light.com)

Design: OM + Bartenbach  
GmbH  
Module with linear extruded lenses (Lightstream)  
combined with a secondary reflector, integrated into  
an extruded aluminium profile.


LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



 LED	2200K-5000K	Light Source	Luminaire
Power	28W*	33W*	
Flux	3650lm*	2900lm*	
Efficiency	120lm/W	85lm/W	
LOR	-	0.8273381294964028	
UGR	-	<19	



Beam angle  
Wide flood 80°  
  
Application  
  
Weight

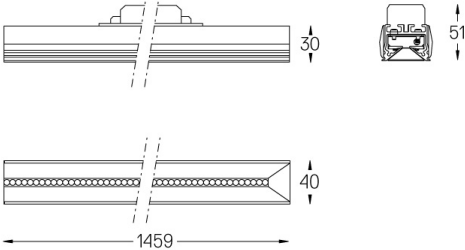

- Finishes
- .01 White / RAL 9010
  - .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
[support@om-light.com](mailto:support@om-light.com)  
  
Choose the length and layout of the system exactly as you want it, to  
model the right lighting functions for different tasks. For further  
information please contact: [support@om-light.com](mailto:support@om-light.com)