





Compatibility with other modules must be confirmed
with support@om-light.com


Design: OM + Bartenbach
GmbH
Module with linear extruded lenses (Lightstream)
combined with a secondary reflector, integrated into
an extruded aluminium profile.

LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

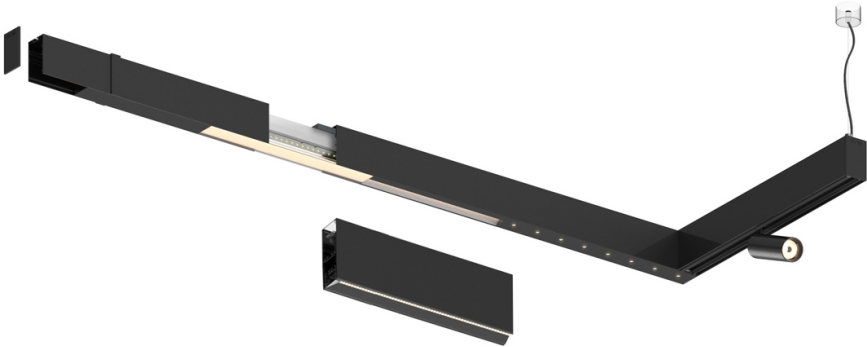

| | | | |
|---|-------------|--------------|--------------------|
|  | 2200K-5000K | Light Source | Luminaire |
| Power | 34W* | | 40W* |
| Flux | 4380lm* | | 3480lm* |
| Efficiency | 120lm/W | | 85lm/W |
| LOR | - | | 0.8273381294964028 |
| UGR | - | | <13 |




Beam angle
Flood 65°

Application

Weight

 mm

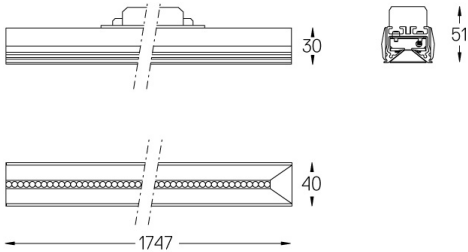

Finishes

 .01 White / RAL 9010

 .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to
model the right lighting functions for different tasks. For further
information please contact: support@om-light.com