





Compatibility with other modules must be confirmed  
with [support@om-light.com](mailto:support@om-light.com)


Design: OM + Bartenbach  
GmbH  
Module with linear extruded lenses (Lightstream)  
combined with a secondary reflector, integrated into  
an extruded aluminium profile.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

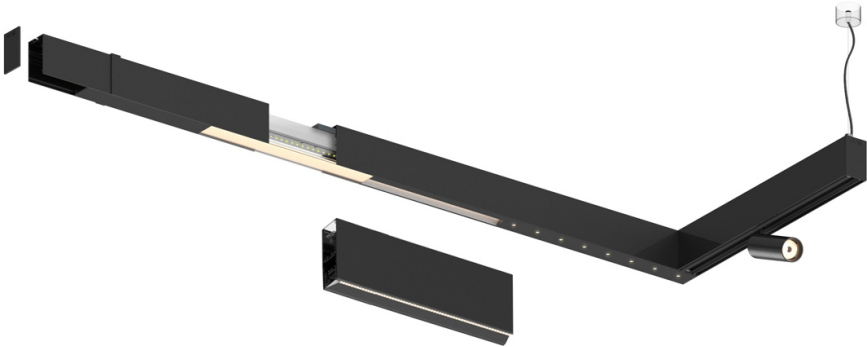


|   |              |           |
|---|--------------|-----------|
|  3000K | Light Source | Luminaire |
| Power   | 22W          | 25W       |
| Flux  | 2760lm       | 2200lm    |
| Efficiency  | 130lm/W      | 89lm/W    |
| LOR   | -            | 0.8       |
| UGR   | -            | <19       |



Beam angle  
Wide flood 80°

Application

Weight

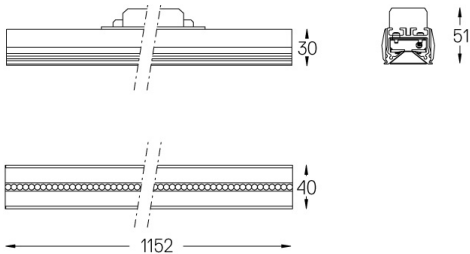

Finishes

 .01 White / RAL 9010

 .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
[support@om-light.com](mailto:support@om-light.com)

Choose the length and layout of the system exactly as you want it, to  
model the right lighting functions for different tasks. For further  
information please contact: [support@om-light.com](mailto:support@om-light.com)