

Compatibility with other modules must be confirmed with support@om-light.com



Design: OM + Bartenbach GmbH


Module with linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.


LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam


Power supply included.

IP20 | 230Vac | 50/60Hz

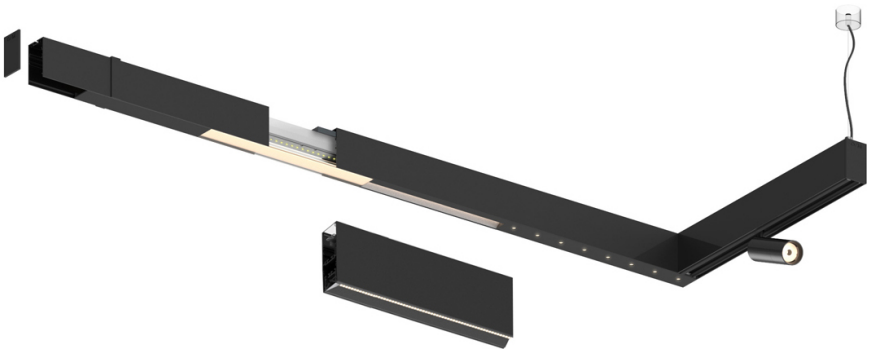

| | | |
|---|--------------|--------------------|
|  3000K | Light Source | Luminaire |
| Power | 20W | 24W |
| Flux | 2520lm | 2040lm |
| Efficiency | 127lm/W | 87lm/W |
| LOR | - | 0.8100000000000001 |
| UGR | - | <19 |




Beam angle
Wide flood 80°

Application

Weight

 mm

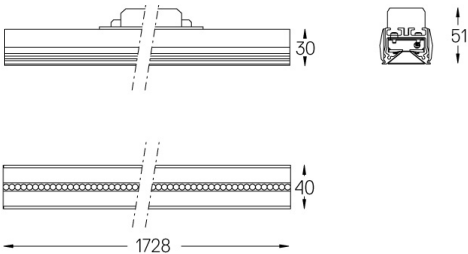

Finishes

 .01 White / RAL 9010

 .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact: support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com