

Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling


Modules

- A inFinit module (middle)
- B inFinit module (end)
- C Indirect module

Design: OM + Bartenbach
GmbH
Module with linear extruded lenses (Lightstream)
combined with a secondary reflector, integrated into
an extruded aluminium profile.
2200-5000K Tunable White.

LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz




|  LED | 2200K-5000K | Light Source | Luminaire |
|---|-------------|--------------|-----------|
| Power | | 28W* | 34,1W* |
| Flux | | 3750lm* | 2900lm* |
| Efficiency | | 134lm/W | 85lm/W |
| LOR | | - | 77% |
| UGR | | - | <16 |




Beam angle
Flood 64°

Application



Weight

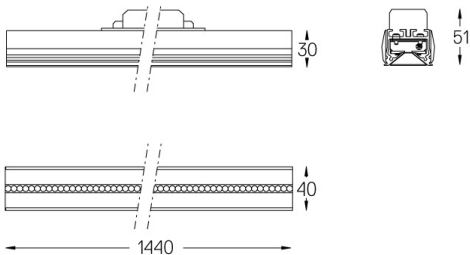

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com
Choose the length and layout of the system exactly as you want it, to
model the right lighting functions for different tasks. For further
information please contact: support@om-light.com