

U45

Made-to-measure

41W / 3360lm / 2700K / DALI / Diffuse /
1679mm


61331

Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.

IP20 | 230Vac | 50/60Hz

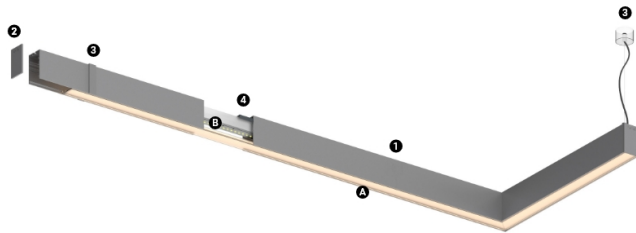


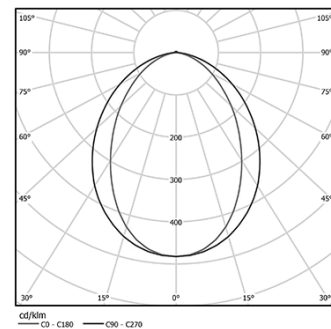
Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Diffuser


- A Polycarbonate frost diffuser
- Light Source**
- B LED Modules

| | | | |
|---|-------|--------------|-----------|
|  LED | 2700K | Light Source | Luminaire |
| Power | | 41W | 48,2W |
| Flux | | 7170lm | 3360lm |
| Efficiency | | 175lm/W | 70lm/W |
| LOR | | - | 47% |
| UGR | | - | <25 |




Beam angle
Diffuse

Application



Weight
0,6Kg

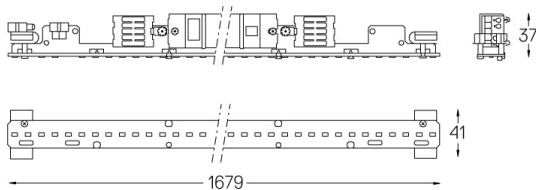

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class D
Model Identifier 89603215