


## U45 Made-to-measure

8,9W / 753,75lm / 3000K / On/Off / Diffuse  
/ 629mm

61336

Design: O/M  
LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

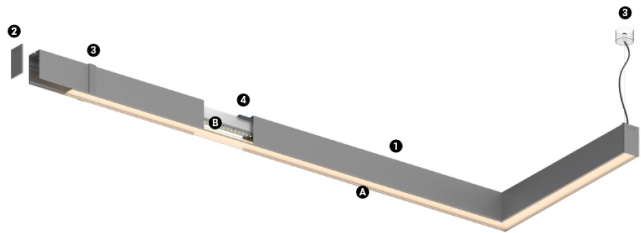

| Structure             | Diffuser                       |
|-----------------------|--------------------------------|
| 1 Profile             | A Polycarbonate frost diffuser |
| 2 End caps            |                                |
| 3 Fitting accessories |                                |
| 4 Profile coupling    |                                |
|                       | Light Source                   |
|                       | B LED Modules                  |

| LED        | 3000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 8,9W         | 11,1W     |
| Flux       |       | 1608,75lm    | 753,75lm  |
| Efficiency |       | 181lm/W      | 68lm/W    |
| LOR        |       | -            | 47%       |
| UGR        |       | -            | <25       |



Beam angle  
Diffuse

Application



Weight  
0,5Kg



### Finishes

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: [support@om-light.com](mailto:support@om-light.com)

### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C  
Model Identifier 89603203, 89603216

