

17W / 1437,5lm / 3000K / On/Off / Diffuse /
699mm

61339

Design: O/M
LED light source with good colour consistency and
long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



- Structure**

 - 1 Profile
 - 2 End caps
 - 3 Fitting accessories
 - 4 Profile coupling
- Diffuser**

 - A Polycarbonate frost diffuser

Light Source


 - B LED Modules

LED	3000K	Light Source	Luminaire
Power		17W	20,7W
Flux		3062,5lm	1437,5lm
Efficiency		180lm/W	69lm/W
LOR		-	47%
UGR		-	<25



- Beam angle**
Diffuse
- Application**
-

Weight
0,5Kg

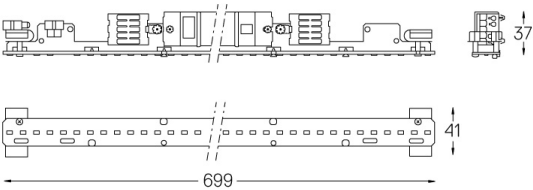

Finishes
Choose the length and layout of the system exactly as you want it, to
model the right lighting functions for different tasks. For further
information please contact: support@om-light.com

Data according to regulations
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class C
Model Identifier 89603206, 89603216