

## U120

### Made-to-measure

**104W / 9300lm / 4000K / On/Off / Diffuse /  
1715mm**

62153


Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz

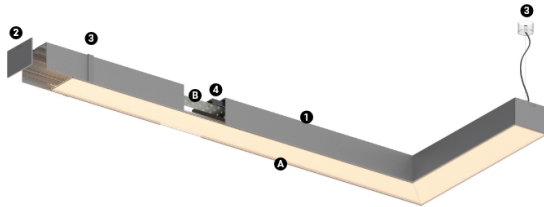


## Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

## Diffuser


- A** Polycarbonate frost diffuser
- Light Source**
- B** LED Modules

 LED	4000K	Light Source	Luminaire
Power		104W	121W
Flux		15000lm	9300lm
Efficiency		143lm/W	77lm/W
LOR		-	62%
UGR		-	<25




Beam angle  
Diffuse

## Application



Weight  
0,57Kg

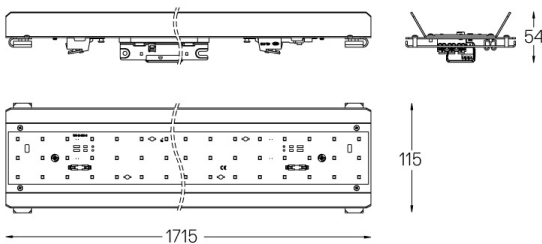

## Finishes

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: [support@om-light.com](mailto:support@om-light.com)

### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
Model Identifier WU-M-536-S-BC-840