

U120

Made-to-measure

**104W / 9300lm / 4000K / On/Off + E-KIT /
Diffuse / 1715mm**

62155


Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz

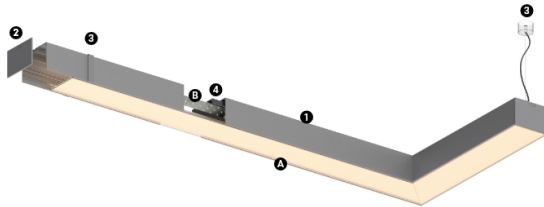



Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Diffuser


- A Polycarbonate frost diffuser
- Light Source**
- B LED Modules

 LED	4000K	Light Source	Luminaire
Power		104W	121W
Flux		15000lm	9300lm
Efficiency		143lm/W	77lm/W
LOR		-	62%
UGR		-	<25




Beam angle
Diffuse

Application



Weight
0,58Kg

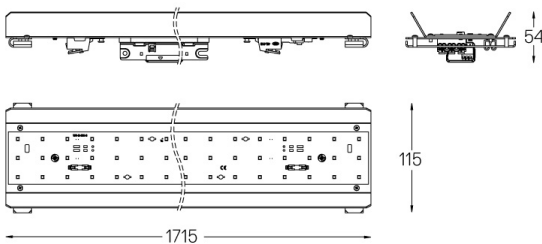

Finishes

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class C
Model Identifier WU-M-536-S-BC-840