

29W / 2490lm / 4000K / DALI / Diffuse /  
857mm

62158

Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



#### Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

#### Diffuser

- A Polycarbonate frost diffuser

#### Light Source

- B LED Modules

| LED        | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 29W          | 35,4W     |
| Flux       |       | 4020lm       | 2490lm    |
| Efficiency |       | 139lm/W      | 70lm/W    |
| LOR        |       | -            | 62%       |
| UGR        |       | -            | <25       |




Beam angle  
Diffuse

Application



Weight  
0,8Kg

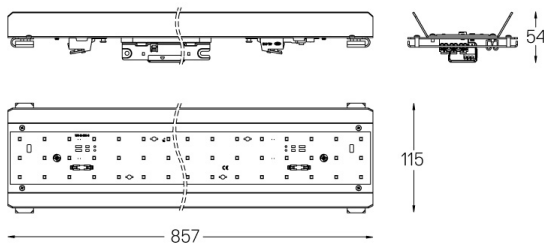

#### Finishes

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

#### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C  
Model Identifier WU-M-526-S-BC-840, WU-M-536-S-BC-840