

U120

Made-to-measure


52W / 4650lm / 4000K / DALI / Diffuse /
857mm

62159

Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

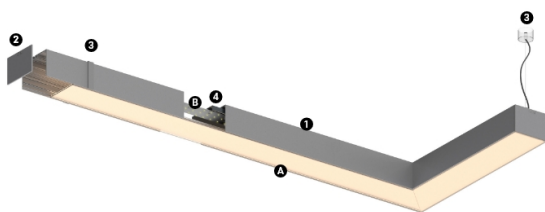

Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Diffuser

- A Polycarbonate frost diffuser

Light Source

- B LED Modules

| LED | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 52W | 62,4W |
| Flux | | 7500lm | 4650lm |
| Efficiency | | 142lm/W | 75lm/W |
| LOR | | - | 62% |
| UGR | | - | <25 |




Beam angle
Diffuse

Application



Weight
0,8Kg

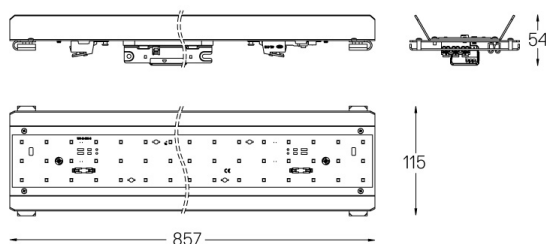

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C
Model Identifier WU-M-526-S-BC-840, WU-M-536-S-BC-840