

20+9W / 1675+700lm / 3000K / On/Off /  
Diffuse / batwing / 1399mm

62304

Design: O/M  
LED light source with good colour consistency and  
long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz




LED	3000K	Light Source	Luminaire
Power		20+9W	24,4+11,3W
Flux		3575+1100lm	1675+700lm
Efficiency		157lm/W	64lm/W
LOR		-	51%
UGR		-	<22



Beam angle  
Diffuse / batwing

Application

Weight  
0,51Kg

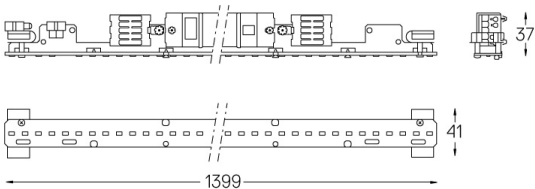

Finishes

Choose the length and layout of the system exactly as you want it, to  
model the right lighting functions for different tasks. For further  
information please contact: support@om-light.com

Data according to regulations  
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
and E  
Model Identifier 89603211, 89603216, WU-M-594-830