


## H45 Made-to-measure

24+13W / 2010+1050lm / 3000K / On/Off /  
Diffuse / batwing / 1679mm

62306



Design: O/M  
LED light source with good colour consistency and  
long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

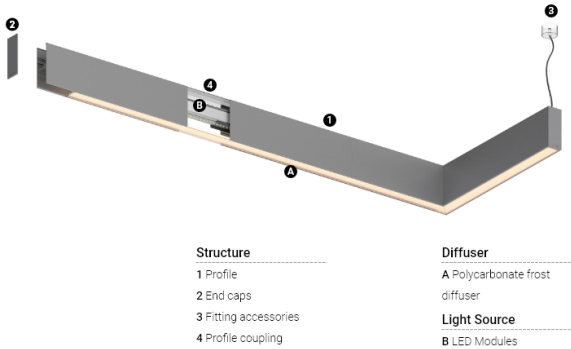

LED	3000K	Light Source	Luminaire
Power		24+13W	29,3+15,9W
Flux		4290+1650lm	2010+1050lm
Efficiency		157lm/W	65lm/W
LOR		-	51%
UGR		-	<22

Beam angle
Diffuse / batwing
Application
Weight
0,57Kg

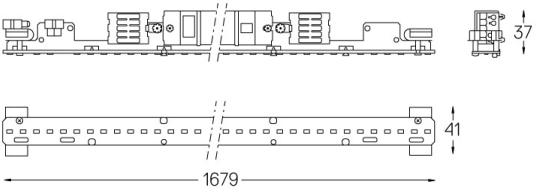

Finishes  
Choose the length and layout of the system exactly as you want it, to  
model the right lighting functions for different tasks. For further  
information please contact: support@om-light.com

Data according to regulations  
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
and E  
Model Identifier WU-M-594-830, 89603216