

## H45

### Made-to-measure


41+30W / 3450+2070lm / 3000K / On/Off /  
Diffuse / batwing / 1679mm

62307

Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

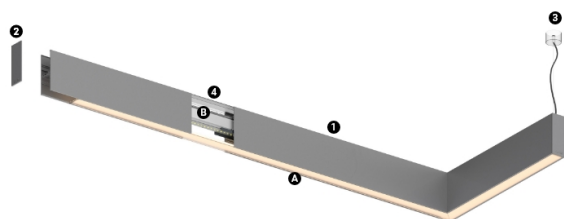

#### Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

#### Diffuser

A Polycarbonate frost diffuser

#### Light Source

B LED Modules

| LED        | 3000K | Light Source | Luminaire   |
|------------|-------|--------------|-------------|
| Power      |       | 41+30W       | 48,2+36,6W  |
| Flux       |       | 7350+3300lm  | 3450+2070lm |
| Efficiency |       | 150lm/W      | 65lm/W      |
| LOR        |       | -            | 52%         |
| UGR        |       | -            | <25         |



Beam angle  
Diffuse / batwing

Application



Weight  
0,57Kg



#### Finishes

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: [support@om-light.com](mailto:support@om-light.com)

#### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C and E

Model Identifier WU-M-594-830, 89603216

