


34+20W / 3300+1480lm / 4000K / On/Off /
Diffuse / batwing / 1399mm

62319

Design: O/M
LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

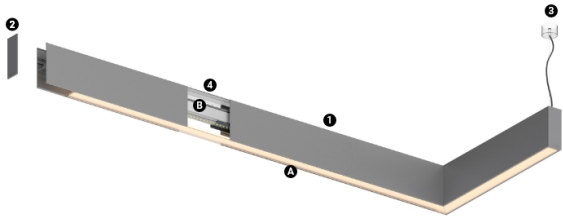

- | | |
|-----------------------|--------------------------------|
| Structure | Diffuser |
| 1 Profile | A Polycarbonate frost diffuser |
| 2 End caps | |
| 3 Fitting accessories | Light Source |
| 4 Profile coupling | B LED Modules |

LED	4000K	Light Source	Luminaire
Power		34+20W	40+24,4W
Flux		6500+2360lm	3300+1480lm
Efficiency		164lm/W	74lm/W
LOR		-	54%
UGR		-	<25



Beam angle
Diffuse / batwing

Application

Weight
0,51Kg



Finishes

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C and E
Model Identifier 89603212, 89603217, WU-M-594-840

