


16+9W / 1420+740lm / 4000K / DALI /
Diffuse / batwing / 1119mm

62324

Design: O/M
LED light source with good colour consistency and
long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

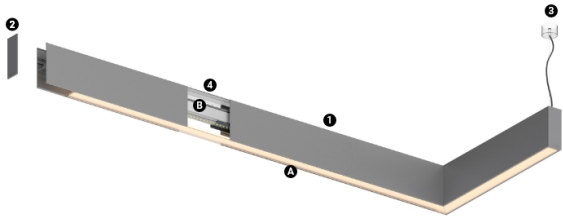

- | | |
|-----------------------|--------------------------------|
| Structure | Diffuser |
| 1 Profile | A Polycarbonate frost diffuser |
| 2 End caps | |
| 3 Fitting accessories | Light Source |
| 4 Profile coupling | B LED Modules |

LED	4000K	Light Source	Luminaire
Power		16+9W	19,5+11,3W
Flux		3020+1180lm	1420+740lm
Efficiency		168lm/W	70lm/W
LOR		-	51%
UGR		-	<22




Beam angle
Diffuse / batwing

Application



Weight
0,58Kg

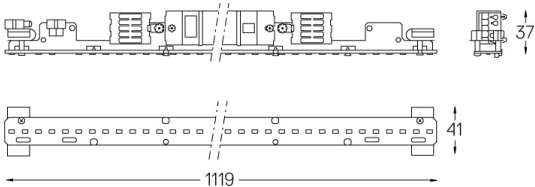

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to
model the right lighting functions for different tasks. For further
information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class C
and E

Model Identifier WU-M-594-840, 89603217