

90W / 3400lm / 2700K / On/Off / Diffuse
indirect / 2970mm

62356



Design: Eduardo Souto de Moura

Pendant luminaire with housing made of aluminium profile with 25micron maximum corrosion resistance anodization with textured electrostatic 100% polyester paint.

Frosted acrylic diffuser with user friendly clipping system.

Steel end caps with textured electrostatic 100% polyester paint.

Frosted acrylic diffuser for indirect light.

Three-phase track (On/Off or DALI) for installing spotlights.

Fitting accessories ordered separately.

LED CRI>90 />50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz




| LED | 2700K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 90W | 130W |
| Flux | | 8500lm | 3400lm |
| Efficiency | | 94lm/W | 26lm/W |
| LOR | | - | 40% |
| UGR | | - | <25 |



Beam angle
Diffuse indirect

Application

Weight
14Kg

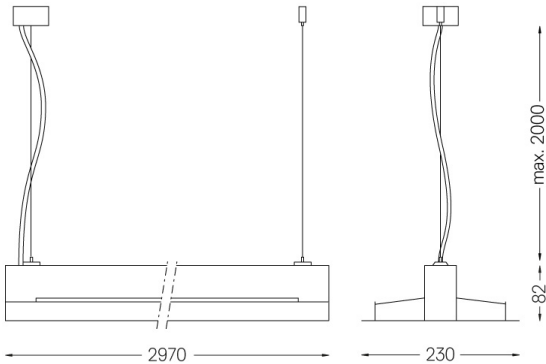

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

Mandatory

54034 Clear base
Ø60x35mm

54080 Aluminium base
Ø60x37mm