

23+45W / 850+1700lm / 2700K / DALI /
Diffuse Direct/ Indirect / 1560mm


62382



Design: Eduardo Souto de Moura
Pendant luminaire with housing made of aluminium profile with 25micron maximum corrosion resistance anodization with textured electrostatic 100% polyester paint.
Frosted acrylic diffuser with user friendly clipping system.
Steel end caps with textured electrostatic 100% polyester paint.
Frosted acrylic diffuser for direct light and indirect light.
Fitting accessories ordered separately.

LED CRI>90 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



|  LED | 2700K | Light Source | Luminaire |
|---|-------|--------------|------------|
| Power | | 23+45W | 33+65W |
| Flux | | 2125+4250lm | 850+1700lm |
| Efficiency | | 94lm/W | 26lm/W |
| LOR | | - | 40% |
| UGR | | - | <25 |




Beam angle
Diffuse Direct/
Indirect

Application



Weight
7Kg

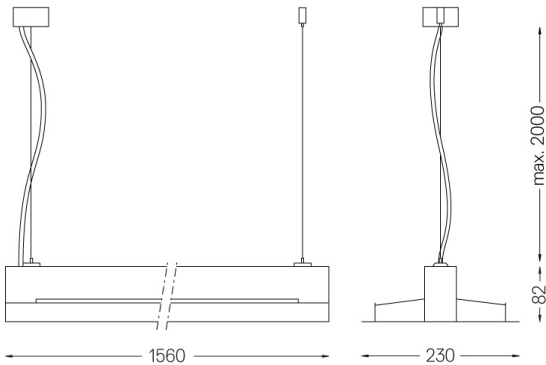

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

Mandatory

56051 Clear base DALI

Ø60x35mm

54081 Aluminium base DALI

Ø60x37mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com