

## Tubo 50

27W / 3580lm / 2700K / DALI / Diffuse /  
1192mm

62569



Design: Eduardo Souto de Moura

Surface or pendant luminaire with tubular shock-resistant frosted polycarbonate body with 50mm diameter.

Clear polycarbonate end caps with marked installation angles. Supplied with 30mm plastic cable gland that

prevents condensation within luminaire.


Fitting accessories ordered separately.


LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP67 | IK08 | 230Vac | 50/60Hz



 LED	2700K	Light Source	Luminaire
Power	27W		32,9W
Flux	4780lm		3580lm
Efficiency	177lm/W		109lm/W
LOR	-		75%
UGR	-		<28

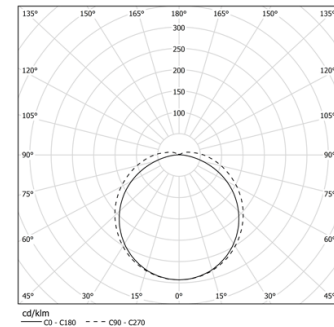


Beam angle  
Diffuse

## Application



Weight  
1,3Kg

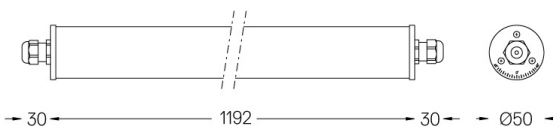

## Finishes

☐ .25 Frost

**Mandatory**

**43701 Surface fitting accessory**

**43705 Pendant fitting accessory**

## Optional

**59057** Stainless steel fitting accessory

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

## Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
Model Identifier 28004771