

O975 Surface/Pendant

26W / 2000lm / 3000K / DALI / Diffuse /
595mm

62708

Design: Eduardo Souto de Moura

Surface or pendant luminaire with housing made of anodised aluminium profile with matt or textured-paint finish and frosted polycarbonate diffuser with user friendly clipping system.

5mm frosted polycarbonate end caps.

Fitting accessories ordered separately.



LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP44 | IK07 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power		26W	31,7W
Flux		2900lm	2000lm
Efficiency		112lm/W	63lm/W
LOR		-	69%
UGR		-	<22




Beam angle
Diffuse

Application



Weight
0,95Kg

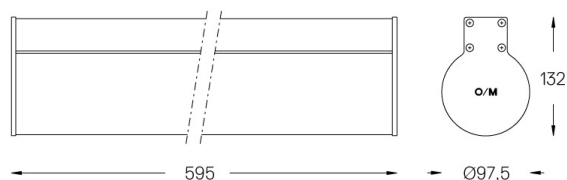

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .10 Anodised aluminium

Mandatory


44070 Pendant fitting accessory

Ø60x35mm

44110 Clear base DALI

Ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

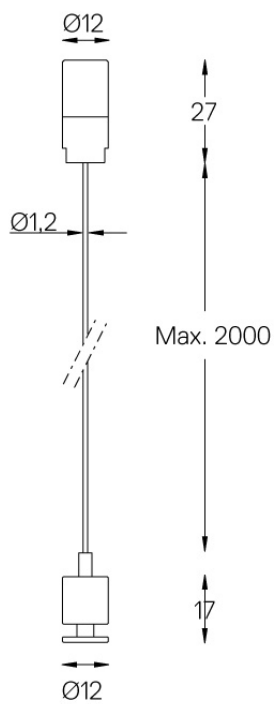




Pendant direct fitting
accessory

44070



One 2m steel cable (Ø1,2mm) for
pendant application with
millimetric height adjustment
system.

One on each end of the profile
segment and every 3m.



DALI (5x0,75mm²). Includes:
 One clear polycarbonate power supply base (IP20).
 One clear power cable (2m).
 One clear power supply base must be applied every 30m (ø60x35mm)