

O975 Surface/Pendant

102W / 8800lm / 4000K / DALI / Diffuse /
2287mm

62722

Design: Eduardo Souto de Moura

Surface or pendant luminaire with housing made of anodised aluminium profile with matt or textured-paint finish and frosted polycarbonate diffuser with user friendly clipping system.

5mm frosted polycarbonate end caps.

Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP44 | IK07 | 230Vac | 50/60Hz



| LED | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 102W | 117W |
| Flux | | 12600lm | 8800lm |
| Efficiency | | 124lm/W | 75lm/W |
| LOR | | - | 70% |
| UGR | | - | <22 |




Beam angle
Diffuse

Application



Weight
3,66Kg

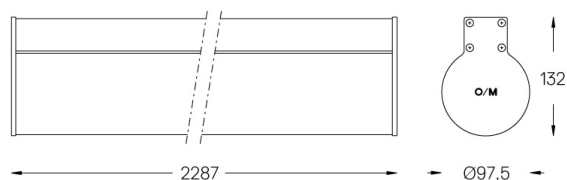

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .10 Anodised aluminium

Mandatory

44070 Pendant fitting accessory

Ø60x35mm

44110 Clear base DALI

Ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com