

## U60

### Made-to-measure


**6,8W / 800lm / 4000K / DALI / Prismatic /  
559mm**

63046

Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

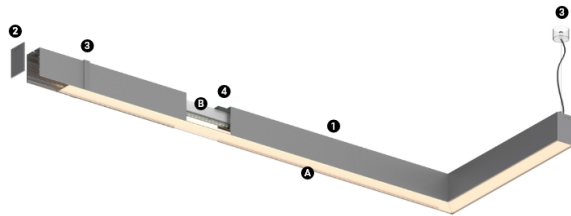


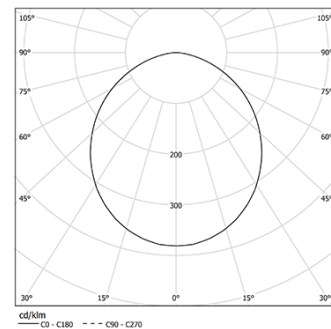
### Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

## Diffuser


- A** Polycarbonate frost diffuser
- Light Source**
- B** LED Modules

 LED	4000K	Light Source	Luminaire
Power	6,8W	8,5W	
Flux	1300lm	800lm	
Efficiency	191lm/W	94lm/W	
LOR	-	62%	
UGR	-	<19	




Beam angle  
Prismatic

## Application



Weight  
0,5Kg

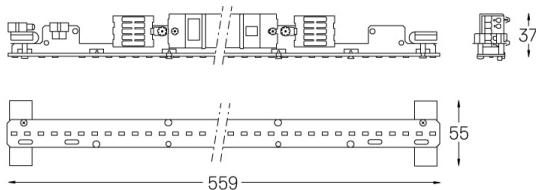

## Finishes

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: [support@om-light.com](mailto:support@om-light.com)

### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class C  
Model Identifier 89603217