



Design: O/M

Surface luminaire with tubular shock-resistant clear polycarbonate diffuser and anti-condensation system comprising a valve that prevents condensation within the luminaire without affecting its high level of protection.

End caps in clear polycarbonate with marked installation angles.

Optic system with acrylic lens.

Equipped with 1m cable (H05RN-F) and a metallic cable gland.

Fitting accessories and IP68 connector supplied separately.


LED CRI>80 />50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP67 | IK08| 230Vac | 50/60Hz



| LED        | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 29W          | 35,4W     |
| Flux       |       | 3240lm       | 2400lm    |
| Efficiency |       | 112lm/W      | 67lm/W    |
| LOR        |       | -            | 84%       |
| UGR        |       | -            | <10       |



Beam angle  
Super spot 10°

Application



Weight  
1,4Kg



Finishes

.20 Clear

Mandatory


43707 Surface fitting accessory




Optional

43431 IP68 Connector

5 poles

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

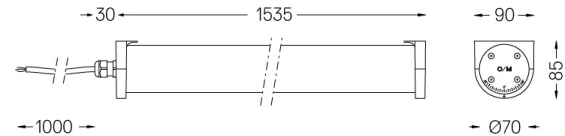

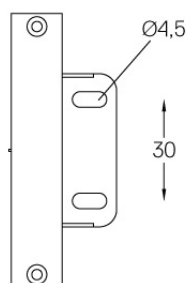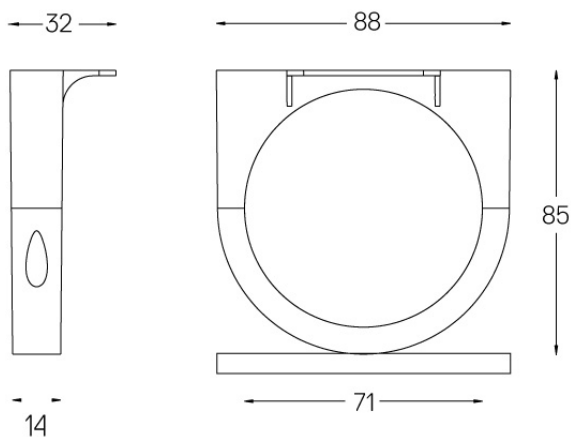

Set of 2 fitting accessories for surface version.

Finishes

● .20 Clear



## Tubo Evo

IP68 Connector

43431



Tubo Evo IP68 Connector  
5 poles, Ø7 to Ø12mm

Weight  
0,04Kg

