

33W / 3400lm / 3000K / DALI / Flood 65° / 2899mm

63152

Compatibility with other modules must be confirmed with support@om-light.com

Design: OM + Bartenbach GmbH
Module with linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz




| | | | |
|------------|---------|--------------|--------------------|
| | 3000K | Light Source | Luminaire |
| Power | 33W | | 39W |
| Flux | 4200lm | | 3400lm |
| Efficiency | 127lm/W | | 87lm/W |
| LOR | - | | 0.8100000000000001 |
| UGR | - | | <13 |



Beam angle
Flood 65°

Application

Weight

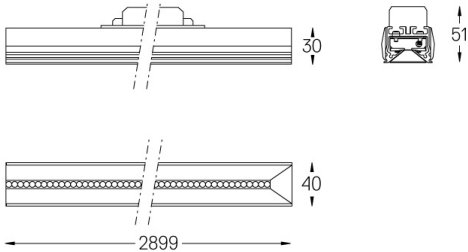

- Finishes
- .01 White / RAL 9010
 - .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact: support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com