

33W / 3600lm / 4000K / DALI / Wide flood  
80° / 2899mm

63162

Compatibility with other modules must be confirmed  
with [support@om-light.com](mailto:support@om-light.com)

Design: OM + Bartenbach  
GmbH  
Module with linear extruded lenses (Lightstream)  
combined with a secondary reflector, integrated into  
an extruded aluminium profile.


LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



| LED        | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 33W          | 39W       |
| Flux       |       | 4500lm       | 3600lm    |
| Efficiency |       | 136lm/W      | 92lm/W    |
| LOR        |       | -            | 0.8       |
| UGR        |       | -            | <19       |



Beam angle  
Wide flood 80°  
Application  
Weight

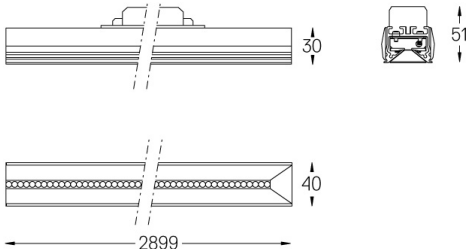

Finishes  
○ .01 White / RAL 9010  
● .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
[support@om-light.com](mailto:support@om-light.com)  
Choose the length and layout of the system exactly as you want it, to  
model the right lighting functions for different tasks. For further  
information please contact: [support@om-light.com](mailto:support@om-light.com)