

Beam Adjustable

4,5W / 350lm / 2700K / On/Off / Medium
23° / ø75mm

63181




Design: O/M
Ceiling-recessed luminaire made of aluminium die-cast.
Adjustable version (orientable by 30° on the horizontal axis and 355° on the vertical axis).
Recessing accessory for flush version supplied separately.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



LED	2700K	Light Source	Luminaire
Power	4,5W		5,8W
Flux	480lm		350lm
Efficiency	107lm/W		61lm/W
LOR	-		73%
UGR	-		<16




Beam angle
Medium 23°

Application

Weight
0,38Kg



Ø70 (trim version)

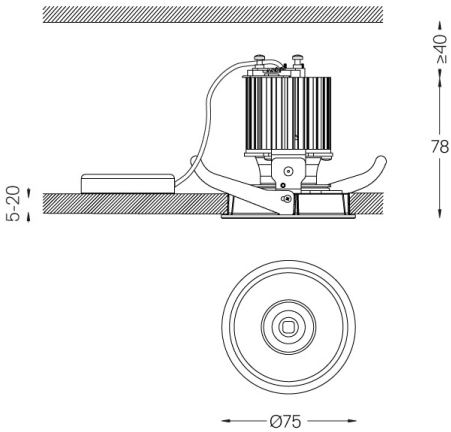

Finishes
○ .04 Matt White
● .05 Matt Black

Optional
59063 Flush accessory (12.5mm ceilings)
176x17mm
59064 Flush accessory (15mm ceilings)
176x19,5mm
59065 Flush accessory (25mm ceilings)
176x29,5mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations
2019/2020/EU supplemented by 2021/341 |2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class F
Model Identifier 2053560245L