

Beam Adjustable

4,5W / 360lm / 2700K / DALI / Flood 37° /
ø75mm

63188



Design: O/M

Ceiling-recessed luminaire made of aluminium die-cast.


Adjustable version (orientable by 30° on the horizontal axis and 355° on the vertical axis).

Recessing accessory for flush version supplied separately.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



| LED | 2700K | Light Source | Luminaire |
|------------|---------|--------------|-----------|
| Power | 4,5W | | 5,8W |
| Flux | 480lm | | 360lm |
| Efficiency | 107lm/W | | 62lm/W |
| LOR | - | | 75% |
| UGR | - | | <19 |



Beam angle
Flood 37°


Application



Weight
0,38Kg



Ø70 (trim version)

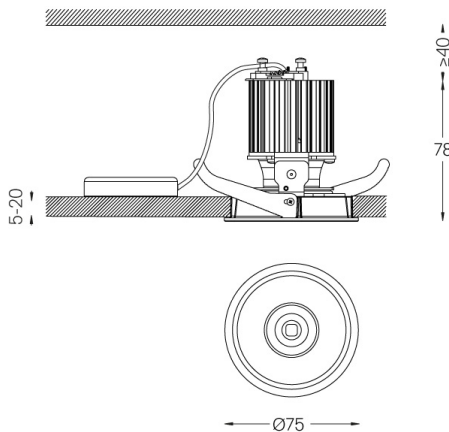

Finishes

- .04 Matt White
- .05 Matt Black

Optional

- 59063** Flush accessory (12.5mm ceilings)
176x17mm
- 59064** Flush accessory (15mm ceilings)
176x19,5mm
- 59065** Flush accessory (25mm ceilings)
176x29,5mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class F Model Identifier 2053560245L