

Beam Adjustable

19W / 1630lm / 2700K / On/Off / Flood 46° /
ø100mm

63213



Design: O/M

Ceiling-recessed luminaire made of aluminium die-cast.


Adjustable version (orientable by 30° on the horizontal axis and 355° on the vertical axis).

Recessing accessory for flush version supplied separately.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



| LED | 2700K | Light Source | Luminaire |
|------------|---------|--------------|-----------|
| Power | 19W | | 23,2W |
| Flux | 2060lm | | 1630lm |
| Efficiency | 108lm/W | | 70lm/W |
| LOR | - | | 79% |
| UGR | - | | <22 |



Beam angle
Flood 46°



Application



Weight
0,5Kg



Ø95 (trim version)

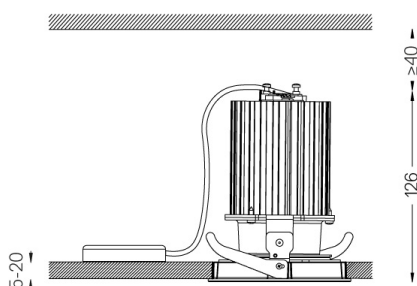

Finishes

- .04 Matt White
- .05 Matt Black

Optional

- 59066** Flush accessory (12.5mm ceilings)
201x17mm
- 59067** Flush accessory (15mm ceilings)
201x19,5mm
- 59068** Flush accessory (25mm ceilings)
201x29,5mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class F
Model Identifier BXR-27G2000-C-73