

Beam Adjustable

10W / 870lm / 2700K / DALI / Flood 46° /
ø100mm

63216



Design: O/M

Ceiling-recessed luminaire made of aluminium die-cast.

Adjustable version (orientable by 30° on the horizontal axis and 355° on the vertical axis).

Recessing accessory for flush version supplied separately.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz




| LED | 2700K | Light Source | Luminaire |
|------------|---------|--------------|-----------|
| Power | 10W | | 12,5W |
| Flux | 1100lm | | 870lm |
| Efficiency | 110lm/W | | 70lm/W |
| LOR | - | | 79% |
| UGR | - | | <22 |



| |
|-------------------------|
| Beam angle Flood 46° |
| Application |
| Weight 0,5Kg |



Ø95 (trim version)

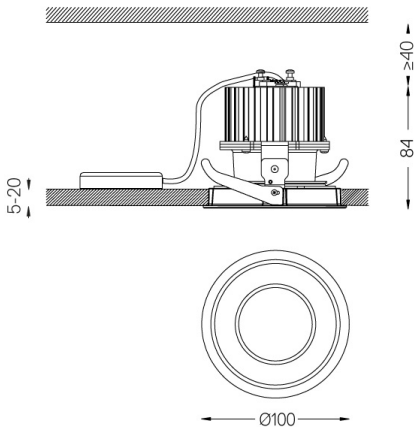

Finishes

- .04 Matt White
- .05 Matt Black

Optional

- 59066** Flush accessory (12.5mm ceilings)
201x17mm
- 59067** Flush accessory (15mm ceilings)
201x19,5mm
- 59068** Flush accessory (25mm ceilings)
201x29,5mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com
The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class F
Model Identifier BXR-27G2000-C-73