

## Beam Adjustable

10W / 1090lm / 4000K / DALI / Medium 28° / ø100mm

63230



Design: O/M

Ceiling-recessed luminaire made of aluminium die-cast.

Adjustable version (orientable by 30° on the horizontal axis and 355° on the vertical axis).

Recessing accessory for flush version supplied separately.

LED CRI>80 / >50.000h, L80/B10  
3-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz




| LED        | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 10W          | 12,5W     |
| Flux       |       | 1450lm       | 1090lm    |
| Efficiency |       | 145lm/W      | 87lm/W    |
| LOR        |       | -            | 75%       |
| UGR        |       | -            | <19       |



|             |            |
|-------------|------------|
| Beam angle  | Medium 28° |
| Application |            |
| Weight      | 0,5Kg      |



Ø95 (trim version)

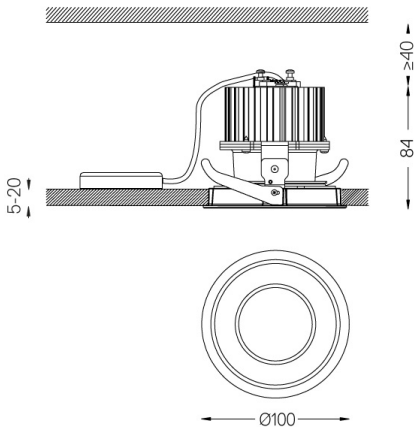

### Finishes

- .04 Matt White
- .05 Matt Black

### Optional

- 59066** Flush accessory (12.5mm ceilings)  
201x17mm
- 59067** Flush accessory (15mm ceilings)  
201x19,5mm
- 59068** Flush accessory (25mm ceilings)  
201x29,5mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com  
The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations  
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class E  
Model Identifier BXR-40E2000-C-73