



Design: O/M + Bartenbach GmbH


Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.


Focal-lens with complex surface and individual complex surface rips to provide a focal point through an aperture for glare free area illumination.

Special springs available on request.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



 3000K	Light Source	Luminaire
Power	6,5W	8,1W
Flux	645lm	470lm
Efficiency	99lm/W	90lm/W
LOR	-	73%
UGR	-	<10

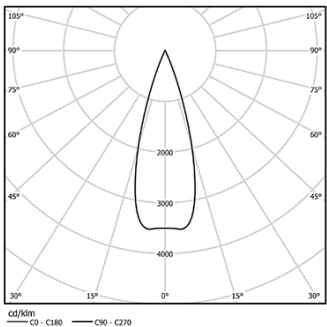


Beam angle  
Medium 31°

Application



Weight  
0,22Kg

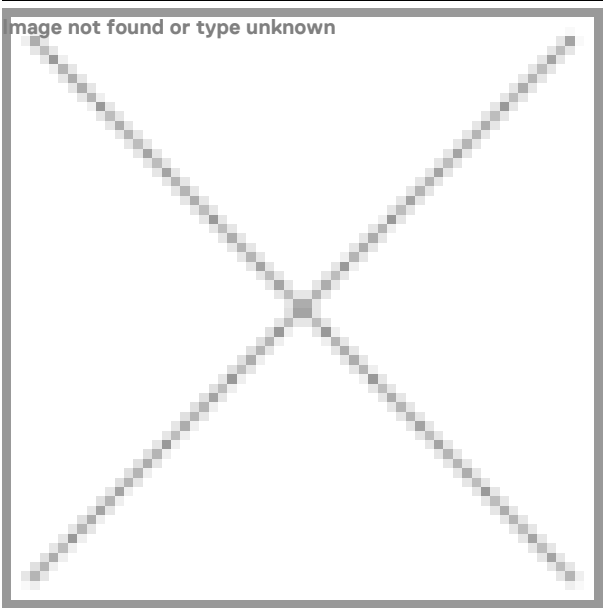

### Finishes

- ☐ .01 White / RAL 9010
- ☒ .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations  
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class E  
Model Identifier 4053560263H