

27W / 1960lm / 3000K / DALI / Flood 52° /  
1200mm

63404

Design: O/M + Bartenbach GmbH  
Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.  
Focal-lens with complex surface and individual complex surface rips to provide a focal point through an aperture for glare free area illumination.  
Special springs available on request.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power	27W		32,9W
Flux	2580lm		1960lm
Efficiency	96lm/W		60lm/W
LOR	-		76%
UGR	-		<13




Beam angle  
Flood 52°

Application



Weight  
0,6Kg

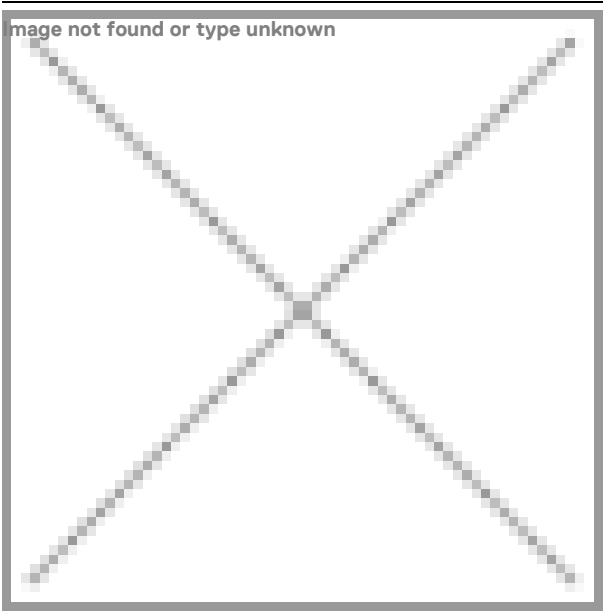

### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com  
The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations  
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class E  
Model Identifier 4053560343L