



Design: O/M + Bartenbach GmbH
Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.
Focal-lens with complex surface and individual complex surface rips to provide a focal point through an aperture for glare free area illumination.
Special springs available on request.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included. DALI DT8
IP20 | 230Vac | 50/60Hz

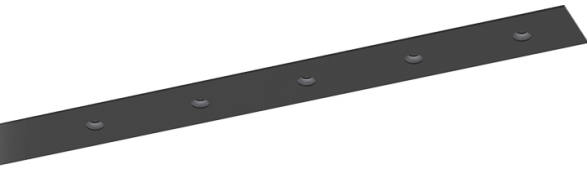


| LED | 2200K-5000K | Light Source | Luminaire |
|------------|-------------|--------------|-----------|
| Power | 23W* | | 28W* |
| Flux | 1880lm* | | 1360lm* |
| Efficiency | 82lm/W | | 48lm/W |
| LOR | - | | 72% |
| UGR | - | | <10 |



Beam angle
Medium 31°

Application

Weight
0,5Kg



26x594

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

