

Design: O/M + Bartenbach GmbH

Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.

Focal-lens with complex surface and individual complex surface ribs to provide a focal point through an aperture for glare free area illumination.

Special springs available on request.


LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included. DALI DT8

IP20 | 230Vac | 50/60Hz




| LED | 2200K-5000K | Light Source | Luminaire |
|------------|-------------|--------------|-----------|
| Power | | 23W* | 28W* |
| Flux | | 1880lm* | 1360lm* |
| Efficiency | | 82lm/W | 48lm/W |
| LOR | | - | 72% |
| UGR | | - | <10 |




Beam angle
Medium 31°

Application



Weight
0,5Kg

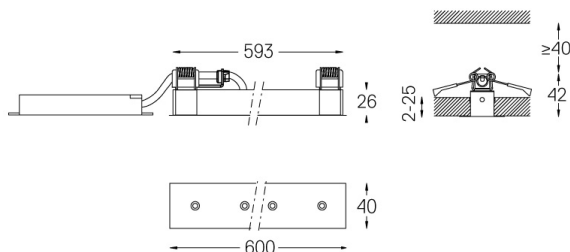

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com